



Ivie's IE-35 Now Offers STI-PA!


Convenient Powerful Cost Effective

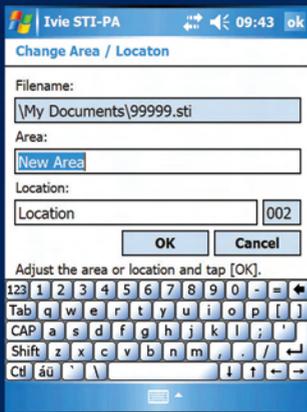

Sophisticated job/area/location system with automated incrementing.

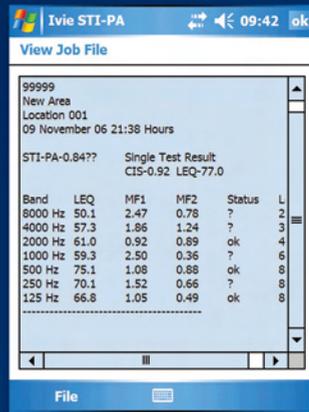


Create reports with detailed measurement data.

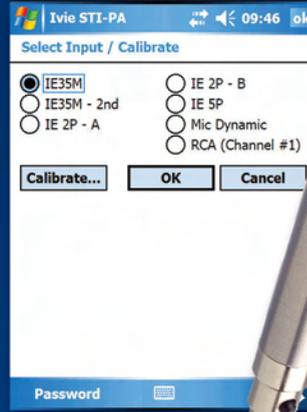


TYPE I microphone available.

Quickly change input microphone selection. Maintain calibration data for each mic.

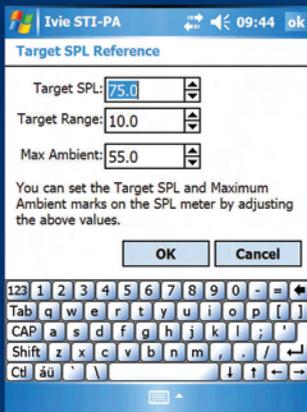

Easily change Target Levels, range, etc., to match venue characteristics.

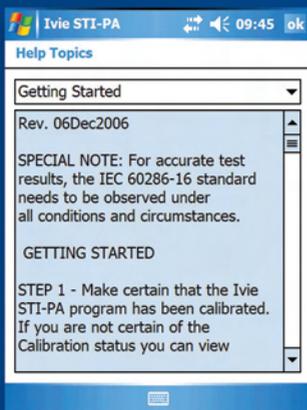

Extensive, easy to use, on-board help files!



Ivie's STI-PA Speech Intelligibility Software

Ivie Technologies, Inc. presents a truly full-featured, compact, user-friendly STI-PA meter. The vivid color display, GUI layout, and button/tab-function interface make Ivie's STI-PA quick and intuitive to operate. Ivie's STI-PA operates on the famous IE-35 hardware platform. It's ultra-compact nature makes it ideal for portability and field use. Measurement information is imparted clearly and quickly. Operation is reliable and versatile. Ivie's STI-PA conforms to IEC 60268-16.

The STI-PA standard package comes with Ivie's respected and versatile IE-35 Audio Analysis software application. The LEQ-35 is available with Type I and Type II packages.

Features / Functions

Vivid color presentation of a Main Screen that allows control of STI-PA measurement and imparts basic test results, File Management System with automated test incrementation for naming and storing job name and job area description information, Stop/Start/Average/Save controls provide intuitive and quick control and measurement info. Report Window gives detailed report information. Output report data.

Main Screen

- * dBAS meter for setting target SPL range, target test SPL, and normal SPL measurement
- * Test in progress status indicator/timer
- * Test status and test result indicator
- * Graphic STI-PA "value" indicator
- * Average accumulator and value of last test displayed
- * Change Area, Options, Preferences
- * Access extensive Help screens

RTA Screen

- * "Corrected Octave Band" RTA display
- * dBAS meter SPL meter display
- * Display "normal" or full dynamic range
- * Mark octave levels for report output

Report Screen

- * Show individual octave LEQ, MF1 & MF2
- * Display CIS value
- * Display test validity by octave
- * Standard deviation of tests in report output

For more information in the LEQ-35 visit www.ivie.com

* This product licensed in the United States under U.S. Patent No. 6,792,404B2 titled "STI Measurement"

CONTACT INFORMATION

Ivie USA
1605 N West State St
Lehi, UT 84043-1084
Tel: (801) 766-7600
Fax: (801) 766-8282
ivie@ivie.com
www.ivie.com

Ivie Europe GmbH, Munich
Bahnhofstr. 30
86938 Schondorf
Germany
Tel: +49 8192-9969-408
Fax: +49 8192-9969-412
info@ivie-europe.com

Ivie Europe, Milan
P.zza Bonaparte 22/E
20030 - Bovisio M. (MI), Italy
Italy
Tel: +39-0362-571116
Fax: +39-0362-596220
info@ivie.it